



HERCULES SERIES


Floor grinders with the innovative DCS system

DOUBLE CUT SYSTEM


KLINDEX introduces the innovative **DCS system** that combines the feature of two Machines into one.

The DCS system allows the satellite grinding diamonds to rotate while the main planetary unit remains stationary. With the DCS system engaged, you get increased satellite speed and a rougher grinding process, which is ideal for scarifying and surfaces that are harder to prepare. With the DCS system engaged, you can quickly remove previous resin and glue for fast aggregate exposure and floor levelling. For standard concrete honing, grinding, and sanding, simply pull the pin to disengage the DCS system and return to the auto-levelling planetary mode. With Klindex, you're getting the options of two different grinding machines in one superior unit.

Ex. Hercules 3 Heads


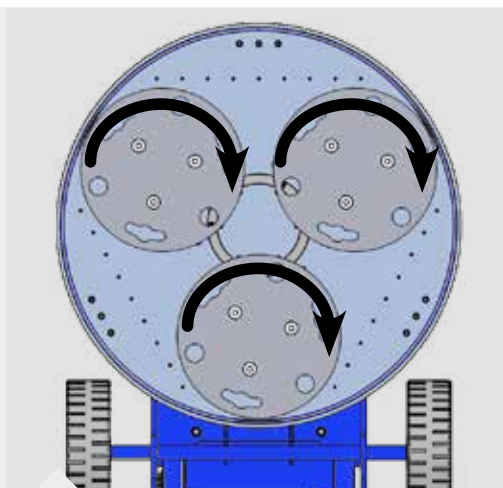


Ex. Hercules 4 Heads

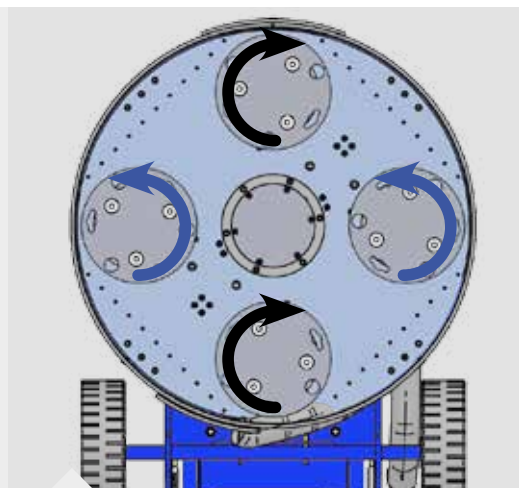


DCS ON: Using the machine in DCS System modality the speed of the satellites is increased turning the Hercules in to a high performance industrial floor preparation machine. Suitable for fast removal of resins and glues, for fast exposing of the aggregates and for fast levelling of very uneven surfaces.

Ex. Hercules 3 Heads

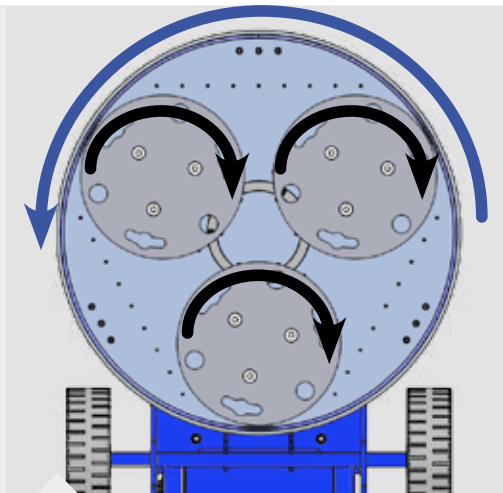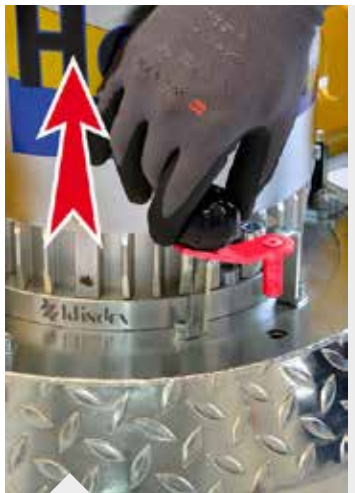


Ex. Hercules 4 Heads

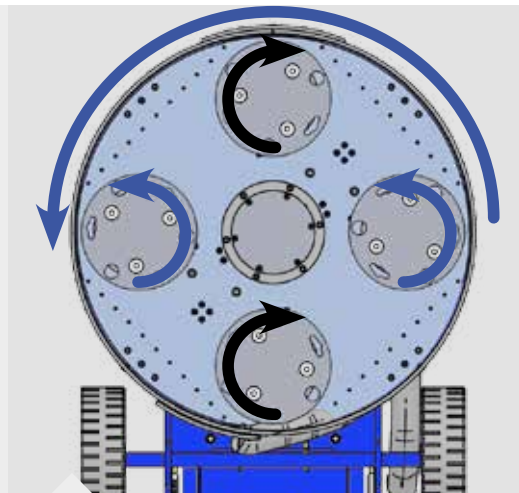

DCS OFF: Using the Hercules in counter rotating modality it is a performing grinding and polishing machine for concrete, marble and natural stone floors.

Why choose HERCULES?

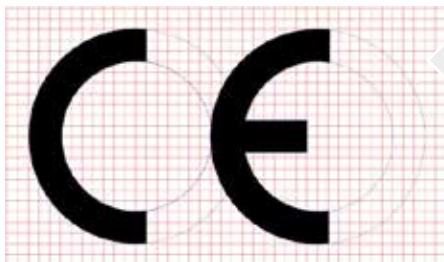

Safety Rules

HERCULES satisfy what the SAFETY RULES (Art EN 60204-1 requires)
Check if the other machine satisfy what the SAFETY RULES



Planetary Head.

PLANETARY HEAD that is 100% tempered metal and geared driven not belt. The main disc and the satellites always run, allowing the machine to work very hard with high performance.

NO BELTS to break!

Check what kind of Planetary they are using. The PLANETARY with BELT DRIVE doesn't have the same performance of metal geared. Furthermore it is subjected to break during the work and needs a lot of time to repair. Attention: in many machines the main disc and the satellite don't run together: if you block one satellite (one tools disc by hand) the main disc still runs. It means that using the machine for heavy duty work the machine doesn't have performance at all.



Selector to block the door of the inverter.

This device avoids the door from being opened before "switching off" the "electric power".

Check if the competitors machine has this device.



Safety device dedicate to monitor the emergency circuit.

This device automatically shuts off the machine if some electric problem happens avoiding any injuries.

KLINDEX uses the right and approved electrical components including oversized wire. Check if the competitors machine has this device. Check the electric components and the kind of wire they use is approved.



Special safety emergency button.

When this special emergency button is pushed the motor is immediately turned off and all the "moving parts" (like tools) are immediately stopped avoiding any injuries. Check if the competitors machine has this device. Many machines in the market that have the emergency button take time to relay the signal therefore could cause injuries.




Re-start safety system.

The new start (re-start) after any stop cannot happen casually. Any start has to be active not passive. It means for example that if any one accidentally connects the electrical power, the machine doesn't start again. To start again the operator has to follow all instructions correctly. Check if the competitors machine has this device. Many machines in the market if after pushing the EMERGENCY BOTTON the electrical power is reconnected accidentally the machine will start again and could cause injury. Be careful to this point and image that while someone is changing the tools that someone doesn't accidentally restore the power!



Dust control Optimized.

Vacuum ports for working dry and Free of Dust.

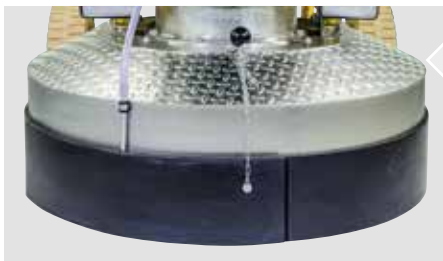

Splash Guard.

Strong and long-lasting perimetral neoprene splash guard.



Variable speed head that adjusts

The Klindex advantage has an available variable frequency control system and motor to provide efficient grinding and polishing, with consistent results. Check the speed. Many machine have speed range very limited



Tank with 46 lt capacity.

The tank is very important for working wet. When working dry the diamond doesn't grip and skates on the surface of the concrete. It is also important for polishing marble, terrazzo and granite.

Many competitor machines don't have a tank. Check and see if it has a water tank.



Effective weight distribution.

Klindex design the motor directly over the top of the planetario with three well balanced heads for perfect balance and highest grinding pressure available (this balance allows it to work as well on marble/granite as it can on concrete) Many competitors machine can't work on marble.



Handle.

Adjustable position of the handle for a comfortable working position. It also can be reversed to allow the operator to drive the machine from in front and not only from the rear. Many machines cannot be used standing in the front but can be handled only from the rear.



Steel Priority.

Steel frame painted with metallic varnish. Steel carter covering the Planetario. The metal covering protects the diamond tools and allows it to work very close to the wall. Many competitors machines have Plastic coverings. It breaks very easily, it doesn't protect the diamond tools and doesn't allow you to work close to the wall. The machine will leave a lot of space untreated.



2 years warranty

The WARRANTY for machines equipped with "hours counter" is extended up to 2 years or 600 hours (the first expiring). To receive the extended warranty the customer only need to follow the service plan program performed by an authorized KLINDEX servicing assistance point. The first service has to be done within 500 hours or within 1 year.



Motor Engine

Motor from 4 up to 15 hp even in UL version, single-phase or three-phase. Check the kind of motor.



Extra weights kit for Hercules series.

Extra weights kit for Hercules 800-750-650. The kit includes: 6 supports and 2 weight 20 Kg each designed for modular use. 3 different functions: • Working position. • Transportation position. • Tools changing position to overturn the machine effortlessly.

TE030901	Extra weights kit	Hercules 800-750-650
TE82101	Extra weight 20 Kg	Hercules 800-750-650



Working position



Transportation position



Tools changing position



HERCULES 800Propane

Propane floor grinder with 4 HEADS
“DCS System” and variable speed.



Floor grinder with “DCS System” and variable speed.

Unique propane powered grinding and polishing machine with geared planetary and 4 headed DCS system. DCS system allows short time in surface preparation, even in the most severe environments. With its DCS system Hercules 800 Propane is considered as the most efficient surface preparation grinding machine in the market. Hercules 800 Propane combines performance and reliability of Klindex grinding and polishing machines with the flexibility of propane motor. Propane Hercules 800 allows independence from generators or power lines. This robust grinder combines hits weight with a working section of 800mm, providing high productivity rates and constant performances. **Main advantages:** • No performance drop and loss of time caused by the power grid. • Exclusive DCS system. • Free from the hassle and costs of extension cords in the yard. • No need of generator. • Accurate and reliable adjustable planetary speed. • Low operating vibrations. • Accommodation. • Light and easy to maneuver. • Ideal for both indoor and outdoor applications. • Dry or wet grinding. • Standard 46 liters water tank. • Tempered steel gear transmission.

Recommended batteries: battery 12V 550 ACC Class.

Superconcrete 7 step: 30-35 m²/h

Concrete Grinding 1 step 110-140 m²/h

Terrazzo Polishing 5 step 30-35 m²/h

Resin Removing 1 step 110-160 m²/h

Varnish Removing 1 step 110-160 m²/h

*Production numbers may vary according to surface conditions, diamonds used, equipment operator, etc.

ESTIMATED PRODUCTION

DATA FOR SHIPPING

Volume Packaging
1,80 m³

Size Packaging
150x145x85 cm

Weight Packaging
500 Kg

TECHNICAL DATA

MODEL	Motor	Power	Propane tank	Speed tools	Working Width	Tools Size	Water Tank	Dimensions WxHxD cm	Weight
HERCULES 800 Propane	Kawasaki FX850V	19,9kW	9 Kg	500-950 rpm	800mm	4x240mm	46 lt	214x130x86	485 Kg



Kawasaki Motor



Led light



9 Kg propane tank

HERCULES 650Propane

Floor grinder with “DCS System” and variable speed.



Floor grinder with “DCS System” and variable speed.

Unique propane powered grinding and polishing machine with geared planetary and 3 headed DCS system. DCS system with 3 heads, allows short time in surface preparation, even in the most severe environments. With its 3 heads DCS system Hercules 650 Propane is considered as the most efficient surface preparation grinding machine in the market. Hercules 650 Propane combines performance and reliability of Klindex grinding and polishing machines with the flexibility of propane motor. Hercules 650 Propane allows independence from generators or power lines. His robust grinder combines its weight with a working section of 25,6”/650mm, providing high productivity rates and constant performances. Hercules 650 Propane is great for outdoor applications where there is limited or no power options. Of course you also use the machine indoors, with good ventilation. **Main advantages:** • No performance drop and loss of time caused by the power grid. • Exclusive DCS system. • Free from the hassle and costs of extension cords in the yard. • No need of generator. • Accurate and reliable adjustable planetary speed. • Low operating vibrations. • Accommodation. • Light and easy to maneuver. • Ideal for both indoor and outdoor applications. • Dry or wet grinding. • Standard 46 liters water tank. • Tempered steel gear transmission. Recommended batteries: battery 12V 550 ACC Class.

Superconcrete 7 step:	15-20 m ² /h
Concrete Grinding 1 step	60-100 m ² /h
Terrazzo Polishing 5 step	15-20 m ² /h
Resin Removing 1 step	60-100 m ² /h
Varnish Removing 1 step	60-100 m ² /h

*Production numbers may vary according to surface conditions, diamonds used, equipment operator, etc.


ESTIMATED PRODUCTION

DATA FOR SHIPPING

Volume Packaging
1,27 m³
Size Packaging
80x120x132 cm
Weight Packaging
397 Kg

TECHNICAL DATA

MODEL	Motor	Power	Propane tank	Speed tools	Working Width	Tools Size	Water Tank	Dimensions WxHxD cm	Weight
HERCULES 650 Propane	Kawasaki FX850V	19,9kW	9 Kg	700-1300 rpm	650mm	3x240mm	46 lt	120x125x67	370 Kg

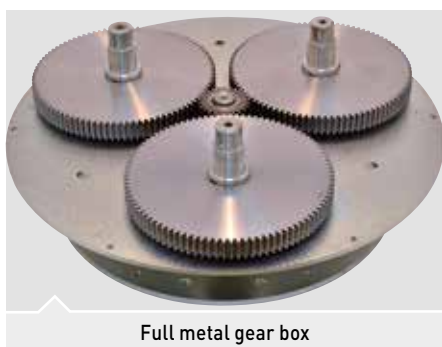

Full metal gear box



Kawasaki motor



9 Kg propane tank

HERCULES 800

Floor grinder with 4 HEADS
"DCS System" and variable speed.



First grinding machine in the world with 4 Heads DCS System.

Hercules series introduces the innovative DCS System that puts in one machine only the features of two different ones. • Using the Hercules in counter rotating modality it is a performing grinding and polishing machine for concrete, marble and natural stone floors. • Using the machine in DCS System modality the speed of the satellites is increased turning the Hercules in to a high performance industrial floor preparation machine. Suitable for fast removal of resins and glues, for fast exposing of the aggregates and for fast levelling of very uneven surfaces.

Main features: • Working width 800 mm with 4 size 240 mm tools. • Speed of tools ranging from 400 to 1300 rpm. • Strong gear box with thermo-hardened steel gears for a longer life. • No noise during the work. • Auto levelling Planetary System. • Unmistakable Italian design.

Superconcrete 7 step	25-30 m ² /h
Concrete Grinding 1 step	100-130 m ² /h
Terrazzo Polishing 5 step	25-30 m ² /h
Resin Removing 1 step	100-150 m ² /h
Varnish Removing 1 step	100-100 m ² /h
Marble Polishing 5 step	10-15 m ² /h
Granite Polishing 7 step	6-10 m ² /h

*Production numbers may vary according to surface conditions, diamonds used, equipment operator, etc.

ESTIMATED PRODUCTION

DATA FOR SHIPPING

Volume Packaging
1,80 m³
Size Packaging
150x145x85 cm
Weight Packaging
450 Kg

TECHNICAL DATA

MODEL	Motor	Volt	Hertz	Amp	Speed tools	Working Width	Tools Size	Water Tank	Dimensions WxHxD cm	Weight
HERCULES 800 VS	15 Hp	380-480	50/60	32	400-1300 rpm	800mm	4x240mm	46 lt	214x130x86	385 Kg



Full metal gear box



4 Heads



Suitable for heavy-duty use

HERCULES 750

Floor grinder with "DCS System" and variable speed.



First grinding machine in the world with DCS System.

Hercules series introduces the innovative DCS System that puts in one machine only the features of two different ones. • Using the Hercules in counter rotating modality it is a performing grinding and polishing machine for concrete, marble and natural stone floors. • Using the machine in DCS System modality the speed of the satellites is increased turning the Hercules in to a high performance industrial floor preparation machine. Suitable for fast removal of resins and glues, for fast exposing of the aggregates and for fast levelling of very uneven surfaces.

Main features: • Working width 750 mm with 3 size 13,5"/340 mm tools. • Speed of tools ranging from 600 to 1300 rpm. • Strong gear box with thermo-hardened steel gears for a longer life. • No noise during the work. • Auto levelling Planetary System. • Unmistakable Italian design.

Superconcrete 7 step:	20-30 m ² /h
Concrete Grinding 1 step	90-110 m ² /h
Terrazzo Polishing 5 step	20-25 m ² /h
Resin Removing 1 step	80-130 m ² /h
Varnish Removing 1 step	80-130 m ² /h
Marble Polishing 5 step	8-13 m ² /h
Granite Polishing 7 step	5-7 m ² /h

*Production numbers may vary according to surface conditions, diamonds used, equipment operator, etc.

ESTIMATED PRODUCTION

DATA FOR SHIPPING

Volume Packaging
1,80 m³
Size Packaging
150x145x85 cm
Weight Packaging
400 Kg

TECHNICAL DATA

MODEL	Motor	Drive Inverter	Volt	Hertz	Amp	Speed tools	Working Width	Tools Size	Water Tank	Dimensions WxHxD cm	Weight
HERCULES 750 VS	10 HP	11 KW	380-480	50/60	32	600-1300 rpm	750mm	3x340mm	46 lt	186x126x77	380 Kg
HERCULES 750 VS	15 HP	11 KW	380-480	50/60	32	600-1300 rpm	750mm	3x340mm	46 lt	186x126x77	390 Kg



Suitable for heavy-duty use



Water nozzle



Intuitive control panel

HERCULES 650

Floor grinder with "DCS System" and variable speed.



First grinding machine in the world with DCS System.

Hercules series introduces the innovative DCS System that puts in one machine only the features of two different ones.

- Using the Hercules in counter rotating modality it is a performing grinding and polishing machine for concrete, marble and natural stone floors.
- Using the machine in DCS System modality the speed of the satellites is increased turning the Hercules in to a high performance industrial floor preparation machine. Suitable for fast removal of resins and glues, for fast exposing of the aggregates and for fast levelling of very uneven surfaces.

Main features: • Working width 26"/650 mm with 3 size 240 mm tools. • Speed of tools ranging from 600 to 1300 rpm. • Strong gear box with thermo-hardened steel gears for a longer life. • No noise during the work. • Auto levelling Planetary System. • Unmistakable Italian design.

Superconcrete 7 step:	12-17 m ² /h
Concrete Grinding 1 step	50-90 m ² /h
Terrazzo Polishing 5 step	11-17 m ² /h
Resin Removing 1 step	45-85 m ² /h
Varnish Removing 1 step	45-85 m ² /h
Marble Polishing 5 step	8-13 m ² /h
Granite Polishing 7 step	5-8 m ² /h

*Production numbers may vary according to surface conditions, diamonds used, equipment operator, etc.

ESTIMATED PRODUCTION

DATA FOR SHIPPING

Volume Packaging
1,31 m³
Size Packaging
120x80x136 cm
Weight Packaging
320 Kg

TECHNICAL DATA

MODEL	Motor	Drive Inverter	Volt	Hertz	Amp	Speed tools	Working Width	Tools Size	Water Tank	Dimensions WxHxD cm	Weight
HERCULES 650 VS	10 HP	7,5 kW	380-480	50/60	16	600-1300 rpm	650mm	3x240mm	46 lt	120x125x67	285 Kg
HERCULES 650 VS USA	10 HP	11 kW	200-240	50/60	30 Breaker	600-1300 rpm	650mm	3x240mm	46 lt	120x125x67	290 Kg



Suitable for heavy-duty use



DCS system



Powerful motors

HERCULES 601

Floor grinder with "DCS System" and variable speed.



First grinding machine in the world with DCS System.

Hercules series introduces the innovative DCS System that puts in one machine only the features of two different ones. • Using the Hercules in counter rotating modality it is a performing grinding and polishing machine for concrete, marble and natural stone floors. • Using the machine in DCS System modality the speed of the satellites is increased turning the Hercules in to a high performance industrial floor preparation machine. Suitable for fast removal of resins and glues, for fast exposing of the aggregates and for fast levelling of very uneven surfaces. **Main features:** • Working width 24"/600 mm with 3 size 240 mm tools. • Variable speed of tools. • Strong gear box with thermo-hardened steel gears for a longer life. • No noise during the work. • Auto levelling Planetary System.

Superconcrete 7 step:	10-15 m ² /h
Concrete Grinding 1 step	40-80 m ² /h
Terrazzo Polishing 5 step	9-15 m ² /h
Resin Removing 1 step	40-80 m ² /h
Varnish Removing 1 step	40-80 m ² /h
Marble Polishing 5 step	7-12 m ² /h
Granite Polishing 7 step	5-7 m ² /h

*Production numbers may vary according to surface conditions, diamonds used, equipment operator, etc.

ESTIMATED PRODUCTION

DATA FOR SHIPPING

Volume Packaging
0,72 m³
Size Packaging
120x80x75 cm
Weight Packaging
170 Kg

TECHNICAL DATA

MODEL	Motor	Drive Inverter	Volt	Hertz	Amp	Speed tools	Working Width	Tools Size	Water Tank	Dimensions WxHxD cm	Weight
HERCULES 601	2900 Watt max	--	230 mono	50	--	800 rpm	600mm	3x240mm	46 lt	120x125x62	140 Kg
HERCULES 601 VS	3000 Watt max	4 kW 230V	230 mono	50/60	--	600-1000 rpm	600mm	3x240mm	46 lt	120x125x62	155 Kg
HERCULES 601 T5	5,5 Hp	4 kW 380V	380-480	50/60	16	800 rpm	600mm	3x240mm	46 lt	120x125x62	160 Kg
HERCULES 601 T5 VS	5,5 Hp	4 kW 380V	380-480	50/60	16	600-1000 rpm	600mm	3x240mm	46 lt	120x125x62	160 Kg
HERCULES 601 T7 VS	7 Hp	7,5 kW	380-480	50/60	16	600-1000 rpm	600mm	3x240mm	46 lt	120x125x62	160 Kg



Full metal gear box



Powerful motors



Intuitive control panel

HERCULES 551

Floor grinder with "DCS System" and variable speed.



First grinding machine in the world with DCS System.

Hercules series introduces the innovative DCS System that puts in one machine only the features of two different ones. • Using the Hercules in counter rotating modality it is a performing grinding and polishing machine for concrete, marble and natural stone floors. • Using the machine in DCS System modality the speed of the satellites is increased turning the Hercules in to a high performance industrial floor preparation machine. Suitable for fast removal of resins and glues, for fast exposing of the aggregates and for fast levelling of very uneven surfaces.

Main features: • Working width 22"/550 mm with 3 size 8"/200 mm tools. • Variable speed of tools. • Strong gear box with thermo-hardened steel gears for a longer life. • No noise during the work. • Auto levelling Planetary System. • Unmistakable Italian design.

TECHNICAL DATA

MODEL	Motor	Drive Inverter	Volt	Hertz	Amp	Speed tools	Working Width	Tools Size	Water Tank	Dimensions WxHxD cm	Weight
HERCULES 551	2900 Watt max	--	220	50	--	800 rpm	550mm	3x200mm	46 lt	120x125x57	135 Kg
HERCULES 551 VS	3000 Watt max	4 kW mono	220	50/60	--	400-1000 rpm	550mm	3x200mm	46 lt	120x125x57	140 Kg
HERCULES 551 T5	5,5 Hp	--	380/480	50/60	16	800 rpm	550mm	3x200mm	46 lt	120x125x57	150 Kg
HERCULES 551 T5 VS	5,5 Hp	4 kW 3phase	380/480	50/60	16	600-1000 rpm	550mm	3x200mm	46 lt	120x125x57	160 Kg

Superconcrete 7 step:	8-12 m ² /h
Concrete Grinding 1 step	35-70m ² /h
Terrazzo Polishing 5 step	8-12 m ² /h
Resin Removing 1 step	35-70m ² /h
Varnish Removing 1 step	35-70m ² /h
Marble Polishing 5 step	6-10m ² /h
Granite Polishing 7 step	5-6m ² /h

*Production numbers may vary according to surface conditions, diamonds used, equipment operator, etc.

ESTIMATED PRODUCTION

DATA FOR SHIPPING

Volume Packaging
0,80 m³
Size Packaging
90x70x128 cm
Weight Packaging
175 Kg



Intuitive control panel



Full metal gear box



DCS system

HERCULES 451

Floor grinder with "DCS System" and variable speed.



First grinding machine in the world with DCS System.

Hercules series introduces the innovative DCS System that puts in one machine only the features of two different ones. • Using the Hercules in counter rotating modality it is a performing grinding and polishing machine for concrete, marble and natural stone floors. • Using the machine in DCS System modality the speed of the satellites is increased turning the Hercules in to a high performance industrial floor preparation machine. Suitable for fast removal of resins and glues, for fast exposing of the aggregates and for fast levelling of very uneven surfaces.

Main features: • Working width 18"/450 mm with 3 size 8"/200 mm tools. • Variable speed of tools. • Strong gear box with thermo-hardened steel gears for a longer life. • No noise during the work. • Auto levelling Planetary System. • Unmistakable Italian design.

Superconcrete 7 step: 7-100 m²/h

Concrete Grinding 1 step: 30-35 m²/h

Terrazzo Polishing 5 step: 6-9 m²/h

Resin Removing 1 step: 30-60 m²/h

Varnish Removing 1 step: 30-60 m²/h

Marble Polishing 5 step: 5-8 m²/h

Granite Polishing 7 step: 4-6 m²/h

*Production numbers may vary according to surface conditions, diamonds used, equipment operator, etc.

ESTIMATED PRODUCTION

DATA FOR SHIPPING

Volume Packaging 0,72 m³

Size Packaging 120x80x75 cm


Weight Packaging 150 Kg

TECHNICAL DATA

MODEL	Motor Watt max	Drive Inverter	Volt	Hertz	Speed tools	Working Width	Tools Size	Water Tank	Dimensions WxHxD cm	Weight
HERCULES 451 USA	1900	--	115	60	600 rpm	450mm	3x200mm	46 lt	120x125x47	120 Kg
HERCULES 451 VS USA	1900	Lenze	115	60	400-900 rpm	450mm	3x200mm	46 lt	120x125x47	125 Kg
HERCULES 451	2900	--	220	50	800 rpm	450mm	3x200mm	46 lt	120x125x47	130 Kg
HERCULES 451 VS	3000	4 kW	220	50/60	600-1000 rpm	450mm	3x200mm	46 lt	120x125x47	135 Kg



Full metal gear box

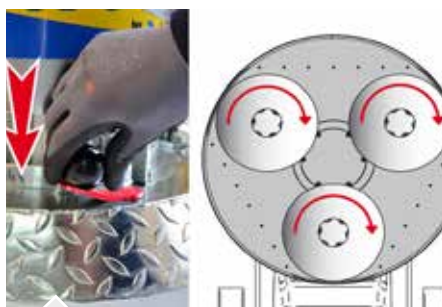

DCS system



Intuitive control panel

ELECTRIC PANEL for construction job sites, with stand and wheels, cable winder and 25 m. extension tube 5G6 with plug of 32A 5P 400V.

TFG20101/SPRT Electric Panel



- 2 sockets of 16A 1Ph 200V.
- 1 socket of 16A 3Ph 5P 400V.
- 1 socket of 32A 3Ph 5P 400V.
- Fiberglass Box Self-extinguishing V0.
- Protection grade IP 65.
- 2 m H07RN-F cable and plug CEE IP 67.
- Sockets protected by interlocked magnetothermic differential.
- Emergency button always present.
- Earthed screw.
- Thermosetting resin handle for portable use.
- Brackets for fastening to wall.
- Fiberglass cable winder.
- Stand and wheels.



Especially suited for construction job sites and difficult environments.

The Electric Panel features a new LED system that helps you to check the line of your building site. Allows you to immediately identify the location of the fault. The LED system also displays the arrival of the earth, allowing you to work safely.

ELECTRIC PANEL

TFG20101C Electric Panel



- 2 sockets of 16A 1Ph 200V.
- 1 socket of 16A 3Ph 5P 400V.
- 1 socket of 32A 3Ph 5P 400V.
- Fiberglass Box Self-extinguishing V0.
- Protection grade IP 65.
- 2 m H07RN-F cable and plug CEE IP 67.
- Sockets protected by interlocked magnetothermic differential.
- Emergency button always present.
- Earthed screw.
- Thermosetting resin handle for portable use.
- Brackets for fastening to wall.

Especially suited for construction job sites and difficult environments.



The Electric Panel features a new LED system that helps you to check the line of your building site. Allows you to immediately identify the location of the fault. The LED system also displays the arrival of the earth, allowing you to work safely.

25 MT. EXTENSION TUBE 5G6 with plug 32A 5P 400V.

PR38073056 Extension



TST-04

TST-02



TESTER for the presence of electric networking on single phase + neutral + ground

TST-04 3phase socket 400V 5 poles 32A

TST-02 3phase socket 400V 5 poles 16A

TSM-01 Civil socket 200V 16A

TSM-02 Shuko socket 200V 16A


EXTENSION TUBE Robust 200 - 25 mt. 5G6 3P+N+T with 32A socket - HQ series

CM035701	Extension tube
----------	----------------


EXTENSION TUBE Robust 200 - 25 mt. 3G4 2P+T with 16A socket - HQ series

CM036501	Extension tube
----------	----------------


EXTENSION TUBE Robust 200 - 25 mt. 5G6 3P+N+T with 16A socket - HQ series

CM036101	Extension tube
----------	----------------


EXTENSION TUBE Robust 200 - 25 mt. 5G10 3P+N+T with 63A socket - HQ series

CM035301	Extension tube
----------	----------------


MULTIPLE - 3 exits 3P+N+T with cable 400V/200V

VB1850	Multiple
--------	----------


MULTIPLE - 3 exits 1P+N+T with cable 200V

VB1552	Multiple
--------	----------



BUSH HAMMER

special tool for many applications.



SANDBLASTING

for Blasting Effect.



PDC SKRAPER

to remove thick rubbery material and coating on floor.



PDC SUPER SKRAPER

to remove thick rubbery material and coating on floor.



BT00 ARROW

thin resin/paint removal on hard concrete.



BT SERIES

for effective grinding and removing resin, glue and varnish.



TCK DA00 SERIES

levelling, coating removal on concrete.



DA SERIES

for medium abrasive concrete.



CD SERIES

for medium hard concrete.



CA SERIES

for abrasive concrete.



CF SERIES

for asphalt and very abrasive concrete.



CS SERIES

for polished Superconcrete® process.



TRAPEZOID SERIES



SPRING HOLD SYSTEM

device for grinding and polishing concrete floors.



JUMPER GREEN SERIES

for polished concrete.



MS SERIES

for grinding marble floors.



YELLOW SERIES

for polishing marble.



MTS SERIES

for grinding travertine, terrazzo, limestone, agglomerate and abrasive marbles.



ORANGE SERIES

for polishing terrazzo, limestone and abrasive marble floors.



GS SERIES

for grinding granite.



RED SERIES

for polishing granite.



PAVELUX SERIES

for removing mastic and grinding abrasive marbles or granites.



ANTIKE BRUSH SERIES

to produce an antique look on stone floors.



EASY KIT

Complete Kit for Grinding and Polishing.

KlindexDemo

Calling the number **+39 085 859546** it is possible to book a **demonstration** at your headquarters or your working site.

Klindex® always close to its customers!



Your local distributor:

